
CLASSIC B - VENTOUX - OXI ÖL
V17063

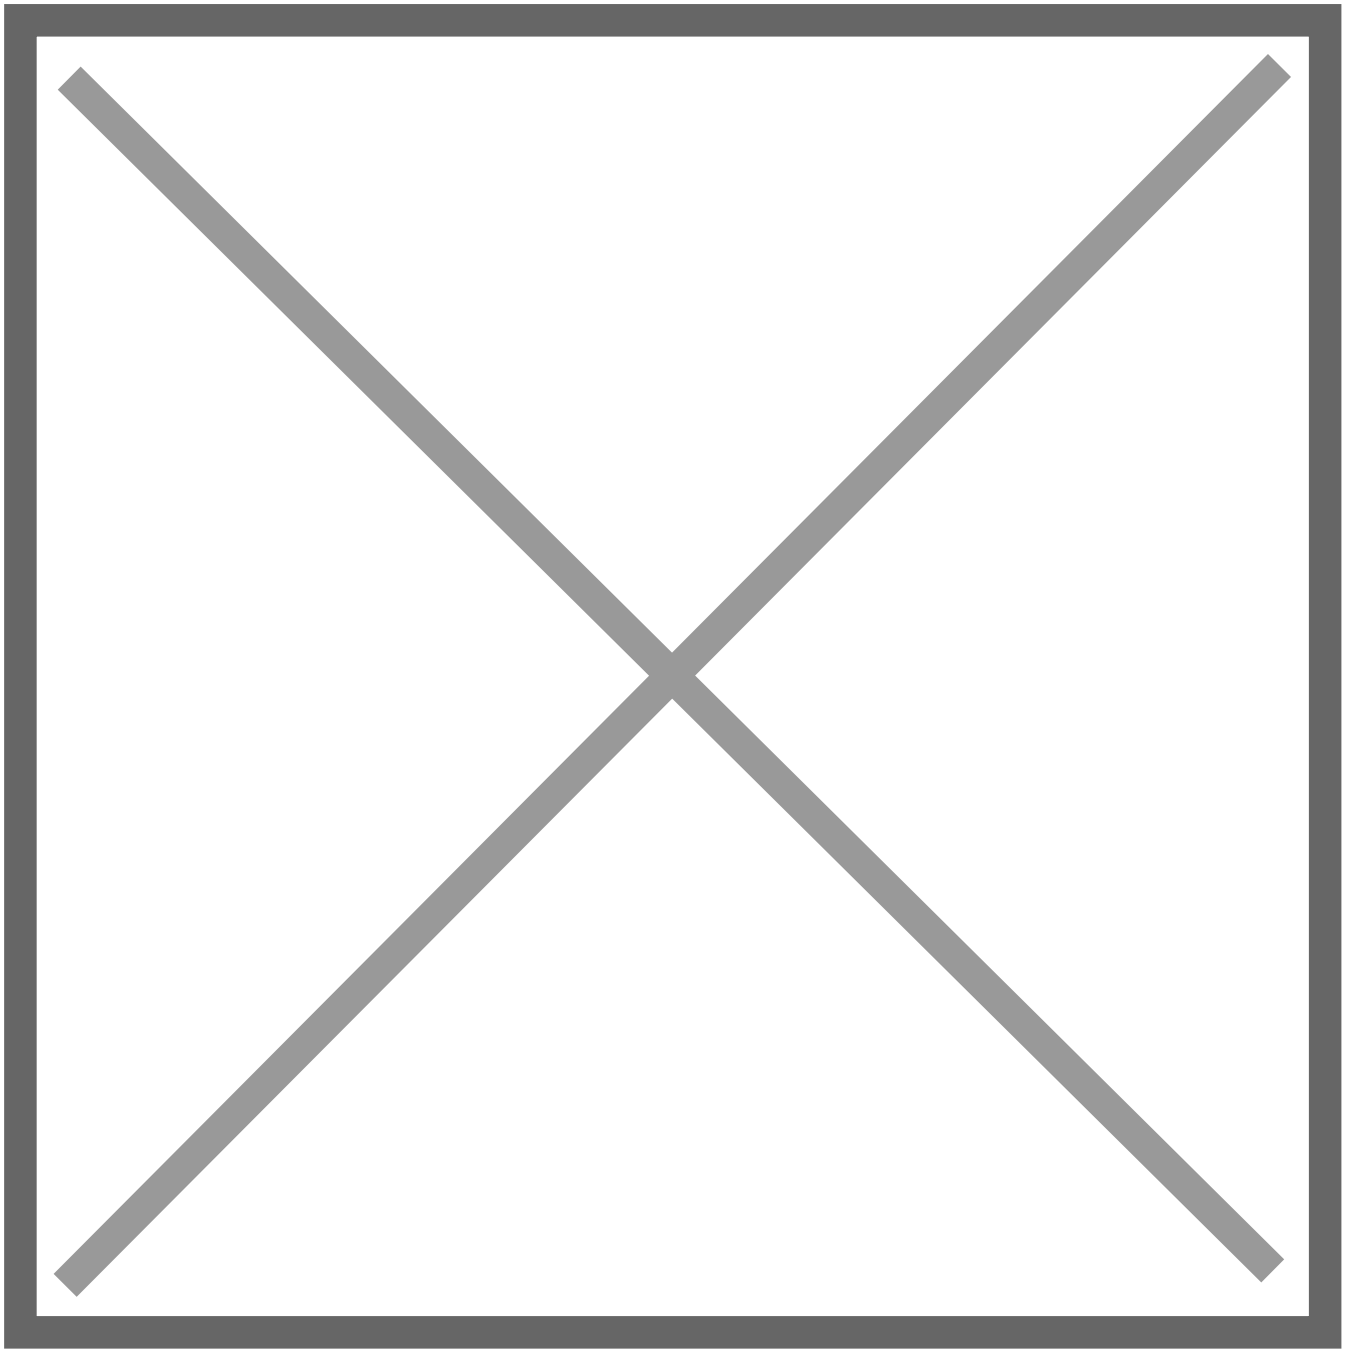

Maßtafel	
LÄNGE	1900 mm
BREITE	190 mm
GESAMTSTÄRKE	15.0 mm
STÄRKE NUTZSCHICHT	4 mm

Maßpaket	
PACKUNGSLÄNGE	1910 mm
PACKUNGSBREITE	200 mm
PACKUNGSSTÄRKE	120 mm
PACKUNGSGEWICHT	24 kg
STÜCK/PAKET	8
M²/PAKET	2.89 m^2

Abmessung Palette	
PALETTENLÄNGE	1930 mm
PALETTENBREITE	1000 mm
PALETTENHÖHE	1080 mm
PALETTENGEWICHT	1100 kg
PAKETE/PALETTE	40
M²/PALETTE	115.60 m^2

© This fact sheet was written by Labeco BVBA, Sprietestraat 326, B-8792 Waregem. Text, photographs, drawings, tables , graphs should in no way be distributed , used or copied unless LABECO BVBA has granted reproduction rights. At the moment of establishment of the sheet, all information is specified correctly. The company reserves the right to change the specifications of the product at any time without prior notice to third parties. The photographs, drawings, tables , graphs used in this sheet are intended only as illustrations. No rights can be derived from them.

CLASSIC B - VENTOUX - OXI ÖL
V17063

MERKMALE

Oberste Schicht

HOLZART	Eiche
LATEINISCHER NAME	Quercus Robur
SORTIERUNG	CLASSIC B
AUFBAU	3-lagig
STÄRKE NUTZSCHICHT	4 mm
DEKOR	1 Streifen
SCHNITTART	Sägefurnier
FASENART	2 Längsseiten 0,75 mm gefast
AUSFÜHRUNG	Öl
OBERFLÄCHENSTRUKTUR	GeborsteldGestructureerd

Zusammensetzung des Trägers

TRÄGERART	Kiefer
GESAMTSTÄRKE TRÄGER	11 mm

Einrichtung

SYSTEM

Dropclick

ANWENDUNGEN

Leichte Nutzung im Haushalt.
Mäßige gewerbliche Nutzung.
Normale gewerbliche Nutzung.
Normale Nutzung im Haushalt.
Intensive gewerbliche Nutzung.

FUßBODENHEIZUNG

Ja

ABSCHLEIFBAR

Ja

© This fact sheet was written by Labeco BVBA, Sprietestraat 326, B-8792 Waregem. Text, photographs, drawings, tables , graphs should in no way be distributed , used or copied unless LABECO BVBA has granted reproduction rights. At the moment of establishment of the sheet, all information is specified correctly. The company reserves the right to change the specifications of the product at any time without prior notice to third parties. The photographs, drawings, tables , graphs used in this sheet are intended only as illustrations. No rights can be derived from them.

CLASSIC B - VENTOUX - OXI ÖL
V17063

TECHNISCHE DATEN

	Norm	Ergebnis
REAKTION AUF FEUER	EN 13501-1	Dfl-S1
FORMALDEHYD-EMISSION	EN 717-1	E1
PCP	CEN/TR 14823	≤ 5ppm
WÄRMELEITFÄHIGKEIT	EN 12667 / ISO 8302	0,11m² k/w
BIOLOGISCHE DAUERHAFTIGKEIT	EN 335	Klasse 1
BRUCHFESTIGKEIT	EN 1533	Pass
SCHLÜPFRIGKEIT	EN 15676	Pass
FEUCHTIGKEITSGEHALT	EN 13183-1	7% (+/-2%)

ZERTIFIZIERUNG

CE

EN 14342

ÉMISSIONS DANS L'AIR INTÉRIEUR A+ A+ A B C

Highly recommended for living areas. AgBB -tested

CODE FOR A SUSTAINABLE BUILT ENVIRONMENT BREEAM

© This fact sheet was written by Labeco BVBA, Sprietestraat 326, B-8792 Waregem. Text, photographs, drawings, tables , graphs should in no way be distributed , used or copied unless LABECO BVBA has granted reproduction rights. At the moment of establishment of the sheet, all information is specified correctly. The company reserves the right to change the specifications of the product at any time without prior notice to third parties. The photographs, drawings, tables , graphs used in this sheet are intended only as illustrations. No rights can be derived from them.