
CLASSIC A - LATOUR - SMOKED OXI OIL
V15605

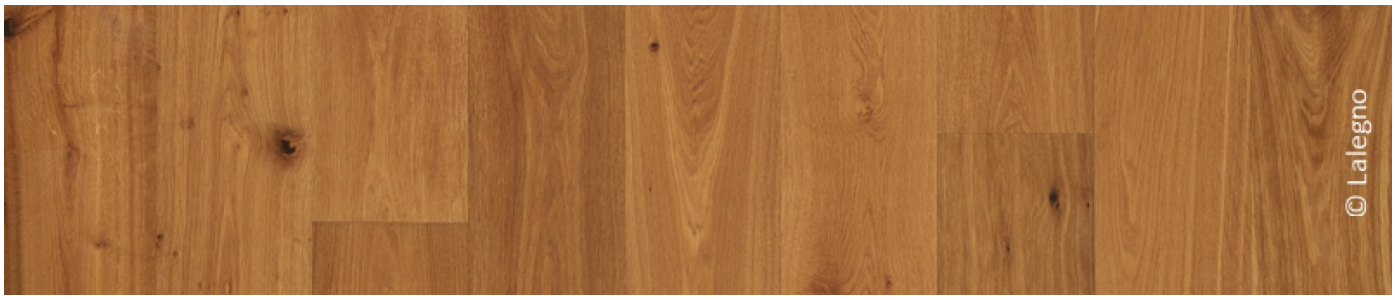

Dimension board	
LENGTH	2200 mm
WIDTH	190 mm
TOTAL THICKNESS	14.0 mm
THICKNESS TOP LAYER	3 mm
LAYER CONTENTS	Min 4 Pl x 2200 mm

Dimension pack	
PACK LENGTH	2220 mm
PACK WIDTH	195 mm
PACK THICKNESS	85 mm
PACK WEIGHT	23 kg
LAYERS/BOX	6
M²/PACK	2.51 m²

Dimension pallet	
PALLET LENGTH	2220 mm
PALLET WIDTH	1000 mm
PALLET HEIGHT	1080 mm
PALLET WEIGHT	1150 kg
PACKS/PALLET	50
M²/PALLET	125.50 m²

CHARACTERISTICS

Top layer	
WOOD SPECIES	Oak
LATIN NAME	Quercus Robur
GRADE	CLASSIC A
CONSTRUCTION	2-laags
THICKNESS TOP LAYER	3 mm
PATTERN	1 strip
CUTTING METHOD	Zaagfineer
BEVEL	Bevel 2 long sides 0,75 mm
FINISH	Oil
SURFACE STRUCTURE	Smooth

Composition of the support	
SUPPORT TYPE	MPX
WOOD SPECIES SUPPORT	Mixed Light Hardwood
TOTAL THICKNESS SUPPORT	11 mm
ADHESION	Kruiselings

Installation

SYSTEM

Tongue and groove

APPLICATIONS

Light household use.
Moderate commercial use.
Normal commercial use.
Normal household use.
Intensive commercial use.

UNDERFLOOR HEATING

Yes

RE-SANDABLE

Yes

© This fact sheet was written by Labeco BVBA, Sprietestraat 326, B-8792 Waregem. Text, photographs, drawings, tables , graphs should in no way be distributed , used or copied unless LABECO BVBA has granted reproduction rights. At the moment of establishment of the sheet, all information is specified correctly. The company reserves the right to change the specifications of the product at any time without prior notice to third parties. The photographs, drawings, tables , graphs used in this sheet are intended only as illustrations. No rights can be derived from them.

CLASSIC A - LATOUR - SMOKED OXI OIL
V15605

TECHNICAL SPECIFICATIONS

	Norm	Result
REACTION TO FIRE	EN 13501-1	Dfl-S1
FORMALDEHYDE EMISSION	EN 717-1	E1
PCP	CEN/TR 14823	≤ 5ppm
THERMAL CONDUCTIVITY	EN 12667 / ISO 8302	0,11m² k/w
BIOLOGICAL DURABILITY	EN 335	Class 1
BREAKING STRENGTH	EN 1533	Pass
SLIPPERINESS	EN 15676	Pass
MOISTURE CONTENT	EN 13183-1	7% (+/-2%)

CERTIFICATION

CE

EN 14342

ÉMISSIONS DANS L'AIR INTÉRIEUR A+ A+ A B C

Highly recommended for living areas. AgBB -tested

CODE FOR A SUSTAINABLE BUILT ENVIRONMENT BREEAM

© This fact sheet was written by Labeco BVBA, Sprietestraat 326, B-8792 Waregem. Text, photographs, drawings, tables , graphs should in no way be distributed , used or copied unless LABECO BVBA has granted reproduction rights. At the moment of establishment of the sheet, all information is specified correctly. The company reserves the right to change the specifications of the product at any time without prior notice to third parties. The photographs, drawings, tables , graphs used in this sheet are intended only as illustrations. No rights can be derived from them.