


# CLASSIC A - HONFLEUR - SMOKED UV LACQUER - CHEVRON

V16950

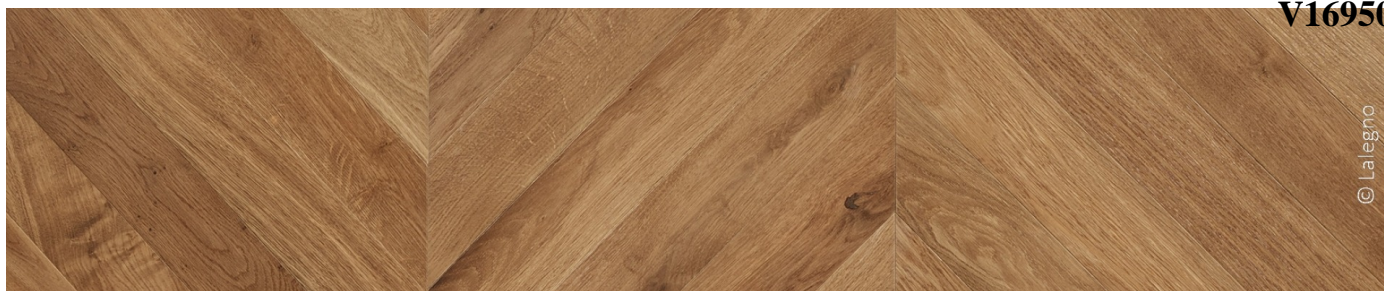

© Lalegno

## Dimension board

LENGTH	520 mm
WIDTH	90 mm
TOTAL THICKNESS	15.0 mm
THICKNESS TOP LAYER	4 mm
LAYER CONTENTS	16

## Dimension pack

PACK LENGTH	590 mm
PACK WIDTH	190 mm
PACK THICKNESS	125 mm
PACK WEIGHT	8 kg
LAYERS/BOX	16
M <sup>2</sup> /PACK	0.75 m <sup>2</sup>

## Dimension pallet

PALLET LENGTH	560 mm
PALLET WIDTH	1000 mm
PALLET HEIGHT	870 mm
PALLET WEIGHT	640 kg
PACKS/PALLET	80
M <sup>2</sup> /PALLET	60.00 m <sup>2</sup>

## CHARACTERISTICS

### Top layer

WOOD SPECIES	Oak
LATIN NAME	Quercus Robur
GRADE	CLASSIC A
CONSTRUCTION	2-layer
THICKNESS TOP LAYER	4 mm
PATTERN	Hungarian point
CUTTING METHOD	Zaagfineer
BEVEL	Micro bevel 4 sides
FINISH	Lacquer
SURFACE STRUCTURE	Brushed

### Composition of the support

SUPPORT TYPE	MPX
WOOD SPECIES SUPPORT	Mixed Light Hardwood
TOTAL THICKNESS SUPPORT	11 mm
ADHESION	Kruiselings

### Installation

<b>SYSTEM</b> Tongue and groove	<b>APPLICATIONS</b> Light household use. Moderate commercial use. Normal commercial use. Normal household use. Intensive commercial use.	<b>UNDERFLOOR HEATING</b> Yes
		<b>RE-SANDABLE</b> Yes

# CLASSIC A - HONFLEUR - SMOKED UV LACQUER - CHEVRON

## TECHNICAL SPECIFICATIONS V16950

	Norm	Result
REACTION TO FIRE	EN 13501-1	Dfl-S1
FORMALDEHYDE EMISSION	EN 717-1	E1
PCP	CEN/TR 14823	≤ 5ppm
THERMAL CONDUCTIVITY	EN 12667 / ISO 8302	0,11m <sup>2</sup> k/w
BIOLOGICAL DURABILITY	EN 335	Class 1
BREAKING STRENGTH	EN 1533	Pass
SLIPPERINESS	EN 15676	Pass
MOISTURE CONTENT	EN 13183-1	7% (+/-2%)

### CERTIFICATION



EN 14342

