


**CLASSIC A - HONFLEUR - LINES - SMOKED UV LACQUER**  
V16951

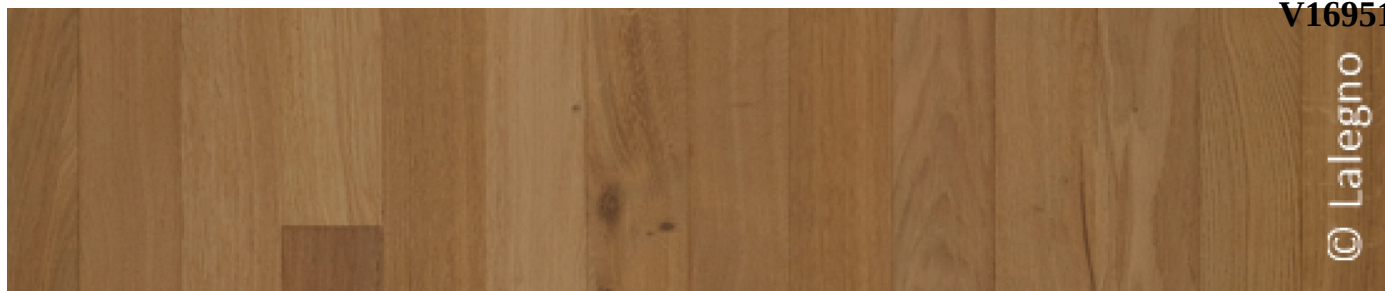

### Dimension board

|                     |                    |
|---------------------|--------------------|
| LENGTH              | 1900 mm            |
| WIDTH               | 90 mm              |
| TOTAL THICKNESS     | 15.0 mm            |
| THICKNESS TOP LAYER | 4 mm               |
| LAYER CONTENTS      | Min 10Pl x 1900 mm |

## Dimension pack

|                      |                     |
|----------------------|---------------------|
| PACK LENGTH          | 1950 mm             |
| PACK WIDTH           | 185 mm              |
| PACK THICKNESS       | 125 mm              |
| PACK WEIGHT          | 25 kg               |
| LAYERS/BOX           | 16                  |
| M <sup>2</sup> /PACK | 2.74 m <sup>2</sup> |

Dimension pallet

|                             |                       |
|-----------------------------|-----------------------|
| <b>PALLET LENGTH</b>        | 1950 mm               |
| <b>PALLET WIDTH</b>         | 1000 mm               |
| <b>PALLET HEIGHT</b>        | 1010 mm               |
| <b>PALLET WEIGHT</b>        | 1225 kg               |
| <b>PACKS/PALLET</b>         | 40                    |
| <b>M<sup>2</sup>/PALLET</b> | 109.60 m <sup>2</sup> |

## CHARACTERISTICS

Top layer

|                     |                            |
|---------------------|----------------------------|
| WOOD SPECIES        | Oak                        |
| LATIN NAME          | Quercus Robur              |
| GRADE               | CLASSIC A                  |
| CONSTRUCTION        | 2-layer                    |
| THICKNESS TOP LAYER | 4 mm                       |
| PATTERN             | 1 strip                    |
| CUTTING METHOD      | Zaagfineer                 |
| BEVEL               | Bevel 2 long sides 0,75 mm |
| FINISH              | Lacquer                    |
| SURFACE STRUCTURE   | Brushed                    |

### Composition of the support

|                         |                      |
|-------------------------|----------------------|
| SUPPORT TYPE            | MPX                  |
| WOOD SPECIES SUPPORT    | Mixed Light Hardwood |
| TOTAL THICKNESS SUPPORT | 11 mm                |
| ADHESION                | Kruiselings          |

## Installation

| SYSTEM            | APPLICATIONS              | UNDERFLOOR HEATING |
|-------------------|---------------------------|--------------------|
| Tongue and groove | Light household use.      | Yes                |
|                   | Moderate commercial use.  |                    |
|                   | Normal commercial use.    | <b>RE-SANDABLE</b> |
|                   | Normal household use.     | Yes                |
|                   | Intensive commercial use. |                    |

# CLASSIC A - HONFLEUR - LINES - SMOKED UV LACQUER

## TECHNICAL SPECIFICATIONS

V16951

|                       | Norm                | Result                 |
|-----------------------|---------------------|------------------------|
| REACTION TO FIRE      | EN 13501-1          | Dfl-S1                 |
| FORMALDEHYDE EMISSION | EN 717-1            | E1                     |
| PCP                   | CEN/TR 14823        | ≤ 5ppm                 |
| THERMAL CONDUCTIVITY  | EN 12667 / ISO 8302 | 0,11m <sup>2</sup> k/w |
| BIOLOGICAL DURABILITY | EN 335              | Class 1                |
| BREAKING STRENGTH     | EN 1533             | Pass                   |
| SLIPPERINESS          | EN 15676            | Pass                   |
| MOISTURE CONTENT      | EN 13183-1          | 7% (+/-2%)             |

## CERTIFICATION



EN 14342

