



Tocca Legno
ACOUSTIC

Technical datasheet

LINE Flex panel



Dimensions	Panel
LENGTH	2700 mm
WIDTH	520 mm
TOTAL THICKNESS	21 mm

Product description

The Line Flex panels are available in a single colour. They are easy to install and maintain. The name "Flex Panel" comes from the panel's flexibility. These panels are ideal for covering corners and curved surfaces, making them a perfect solution for various design applications.

Colours

Our acoustic panels are available in one colour:



LINE FLEX - INVISIBLE



Pliable!

Materials

MDF with oak veneer on three sides. All slats have a width of 18 mm. The slats are mounted on a black felt backing, which is made of 50% recycled materials.

Maintenance

The panels can be easily cleaned with a duster or a well-wrung cloth. Caution: Always test on a small area before treating the entire surface.



Tocca Legno
ACOUSTIC

Technical datasheet


LINE Flex panel

Installation

These panels can be installed on curved surfaces, making them ideal for covering challenging areas and unique designs. Additionally, they can also be mounted in a traditional flat manner, as illustrated below.

Installation method:

Direct gluing to the wall (the wall must be flat, clean, and dust-free), using an MS polymer-based adhesive.

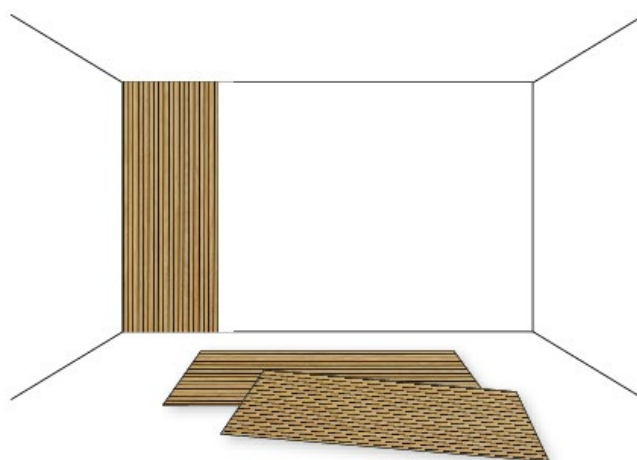

Overview technical specifications

MODEL	Wooden slat wall panel
PANEL SIZE	Length : 2700 mm – Width: 520 mm – Thickness: 21 mm
MATERIALS	18 mm MDF + 3 mm polyester
PANEL DESIGN	Single slat (18 mm wide), placed every 5 mm on the PET panel (see image below).
FINISH	Oak veneer
FIRE RATING	D- s3,d2



Tocca Legno
ACOUSTIC

Technical datasheet

LINE Flex panel



The Tocca Legno acoustic panels have been tested in a certified laboratory to measure sound absorption according to the ISO354 standard.

Installation method	α_w	Classe
Direct gluing	0,20	E

